


INSTALLATION MANUAL

SFB-1001

ACCESSORY:

SEMI Frame Bracket

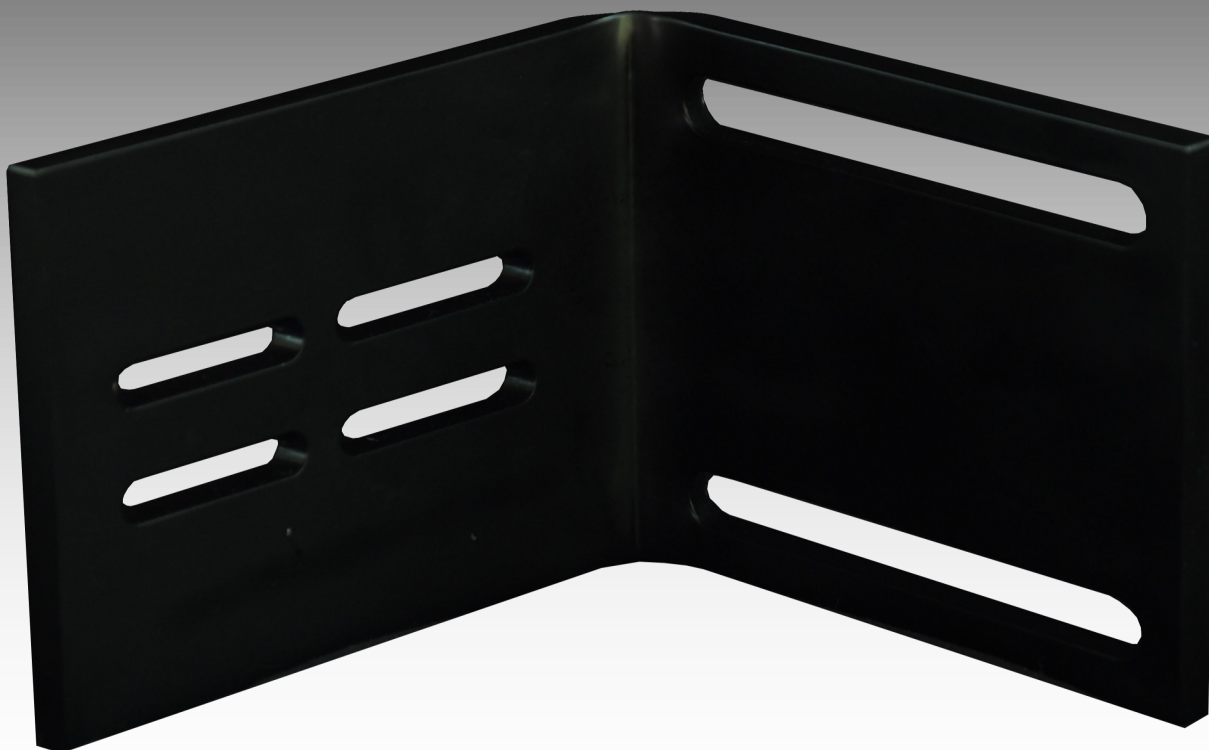

FASS[®]
Diesel Fuel Systems

ENGINEERED EXCELLENCE

Dear Valued Customer,

“Made in the USA” is not just a slogan at FASS; it’s what we live by! FASS is not only assembled in the USA but 98%+ of the FASS product is manufactured in the USA, helping to employ Americans and strengthen America. At FASS, we scrutinize our suppliers and demand the highest quality American-made components. However, this does come at a price, which is one of the main reasons FASS products are more expensive than the competition. Remember price does not dictate quality but quality does dictate price! Here at FASS, we believe it’s worth the commitment and will continue this practice to support America! Our competition is doing exactly the opposite by using foreign-made components.

Building extremely “High-Quality” fuel products is our business. We concentrate all of our efforts in this arena. No one else is as specialized as FASS in what we do! This is one of the ingredients to insure you are running with the “Highest-Quality” fuel system in the world! We have implemented very rigorous testing procedures to provide the “Highest Quality” we have become known for. Not only is our product superior, but customer satisfaction is #1 at FASS. It is our goal to provide the best service possible. Our confidence is evident in the products we make as each product is backed by an industry leading warranty!

Our R & D department, in conjunction with our Dealer Support department, is continually searching for ways to improve quality, expand our product line, and provide superb support to our network of dealers so our customers’ needs and expectations will be exceeded.

To help insure you receive the proper system and customer support at the local level, FASS has a VIP and Authorized Dealer network representing FASS products. We recommend you go to www.FASSride.com, click “Find A Dealer”, put in their ZIP code, select the type of dealer, and see if the company you purchased from is listed. If they are not, put their phone number in the field below the ZIP code field to see if they are listed. Below these two fields is a list of “Terminated/Unauthorized” dealers. You may want to review this list. If the company is not listed or is on the “Terminated/Unauthorized” list, we suggest you return the product immediately to that dealer and call FASS. We’ll recommend you to the nearest dealer.

INSTALLATION MANUAL

Follow these steps to ensure a simple installation of your new FASS ACCESSORY

1. *Read the installation manual completely before attempting installation. The installation of this product indicates that the buyer has read and understands the limitations of the FASS manufacturers warranty agreement and accepts the responsibility of its terms and conditions.*
2. Inventory the package components. Notify the place of purchase immediately of any parts missing or damaged.
3. The installation recommendations contained herein are guidelines. Use good judgment and take into consideration your vehicles' accessories.
4. For best results in accuracy and efficiency (due to training, communication, and our relationship with our dealer network), we recommend an Authorized or ViP FASS Fuel Systems dealer for the installation. They are prepared to install the FASS fuel pumps with the most efficiency. If a situation/problem arises during the installation, they are the most prepared for that situation/problem. DPPI is not responsible for any installation mistakes.
5. If you have any questions or concerns that can not be addressed with your dealer, email or call FASS.
6. If any installation procedure is uncertain, contact FASS technical support.

Email techsupport@FASSride.com with the following information:

- Your Name, address and daytime phone number
- Date of purchase
- Nature of Your Concern


Call customer service; [636-433-5410](tel:636-433-5410) with the following information:

- Date of purchase


CONTENTS




FB-1011A

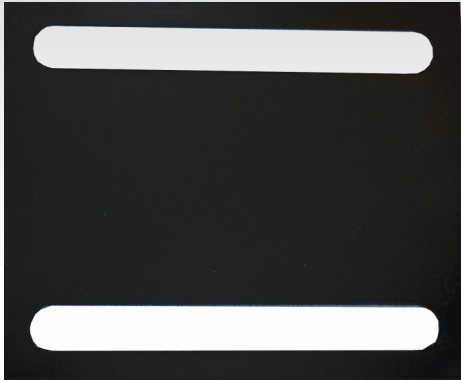

FB-1011B

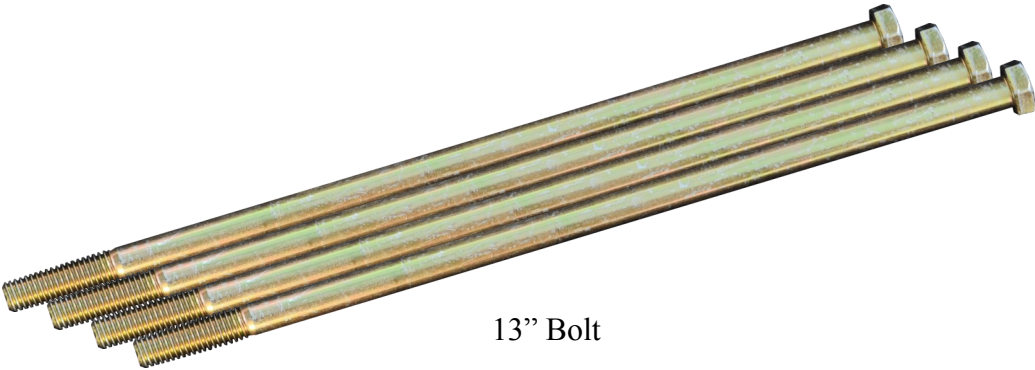

13" Bolt

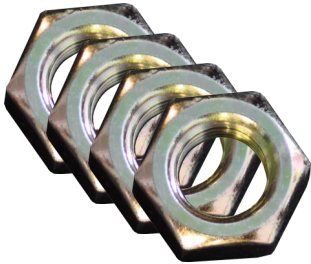

1/2" Nut



Lock Washer



1/2" Washer

INSTALLATION

- A. Slide 1/2" washer onto each one of the 13" bolts.



Note: Either frame bracket may be placed on top or bottom of the frame opposite of mating frame bracket.

- B. Place 13" bolts with 1/2" washer through the slots.




- C. Spread the bolts apart, place bracket over frame with 2 bolts on each side of the frame.



- D. Place the FB-1011B while inserting the threaded end of the 13" bolts through the slots.






- E. 1st slide the 1/2" washer on followed by the lock washer and nut. Repeat this for all 4 bolts. Snug all 4 nuts down to the point where the brackets will slide.

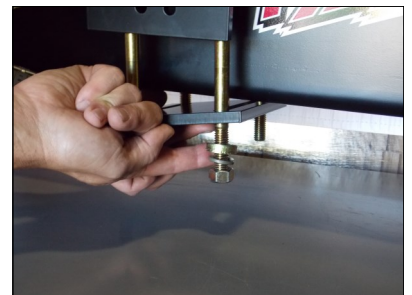


INSTALLATION

- F. 1st slide the 1/2" washer on followed by the lock washer and nut. Repeat this for all 4 bolts. Snug all 4 nuts down to the point where the brackets will slide.

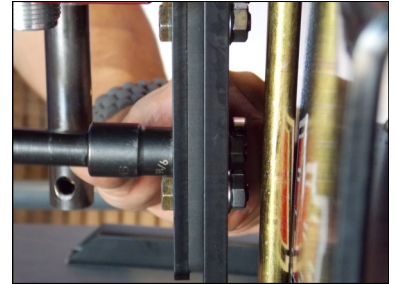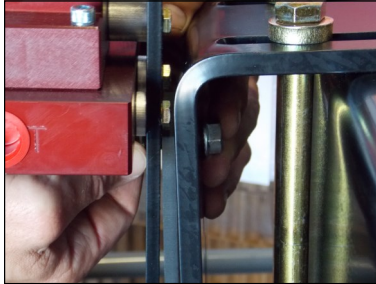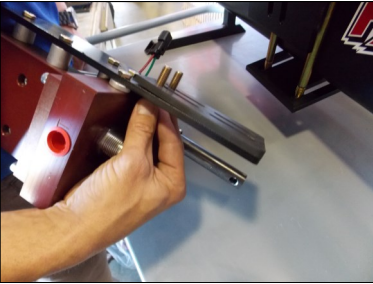

- G. 1st slide the 1/2" washer on followed by the lock washer and nut. Repeat this for all 4 bolts. Snug all 4 nuts down to the point where the brackets will slide.

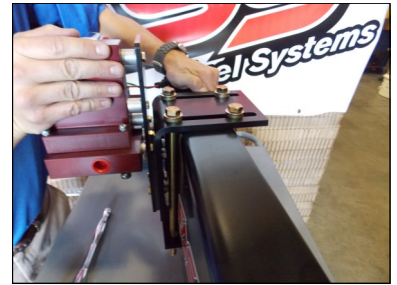

- H. 1st slide the 1/2" washer on followed by the lock washer and nut. Repeat this for all 4 bolts. Snug all 4 nuts down to the point where the brackets will slide.

